

Division Manager & Supreme Printing








Product Basic

MODEL DEVELOPMENT CODE	Rhein 2	Rhein 2p	Product Basic
PROPOSED MODEL NAME	bizhub C352	bizhub C352p	Product Configuration
SUCCESSOR MODEL FOR	bizhub C351	N / A	System Specifications
ESTIMATED SALES START	May 2006	May 2006	Copier Specifications
DATAQUEST SEGMENT	III	---	Printer Specifications
ALSO AVAILABLE AS	Develop ineo+ 352	Develop ineo+ 352P	Scanner Specifications
	Olivetti d-color MF 35	Olivetti d-color MF 35P	Fax Specifications
	Océ CS 191	No	Consumables
TYPE	Desktop/Console, Stationary Platen	Desktop/Console	Article Numbers
MAX. MONTHLY COPY VOLUME	Rec. 35 k Max. 55 k	Rec. 35 k Max. 55 k	Installation
AVERAGE MONTHLY COPY VOLUME	B / W: 8 k Color: 2 k	B / W: 3 k Color: 3 k	Maintenance
MACHINE LIFE	1.200 k copies or 5 years, whichever comes first		Spare Parts
MCBF BODY (Mean Copies Between Failure)	Color: 31.000 copies B & W: 61.000 copies Total: 51.125 copies	Color: 24.012 copies B&W: 47.250 copies Total: 31.847 copies	Recommended Media
a-value	B&W: 610 Color: 310		Appendix
PAPER FEED FAILURE RATE (sheets)	Color Paper: 1/3.000 Plain Paper: 1/2.000		
REPAIR TIME	50 min.		
PM-TIME	40 min.		
STANDARD COPY MODE	Color Print: 4 pages / job Monochrome Print: 4 pages / job		
STANDARD ORIGINAL DENSITY	Full Color Print: 5 % (C, M, Y, K) Monochrome Print: 5 % (Bk)		
SAFETY & ENVIRONMENT			
English Data Sheets	InfoHub / Business Solutions / Safety and Environment		
German Data Sheets	http://partner.konicaminolta.de		


Product Configuration

SYSTEM DIMENSIONS bizhub C352

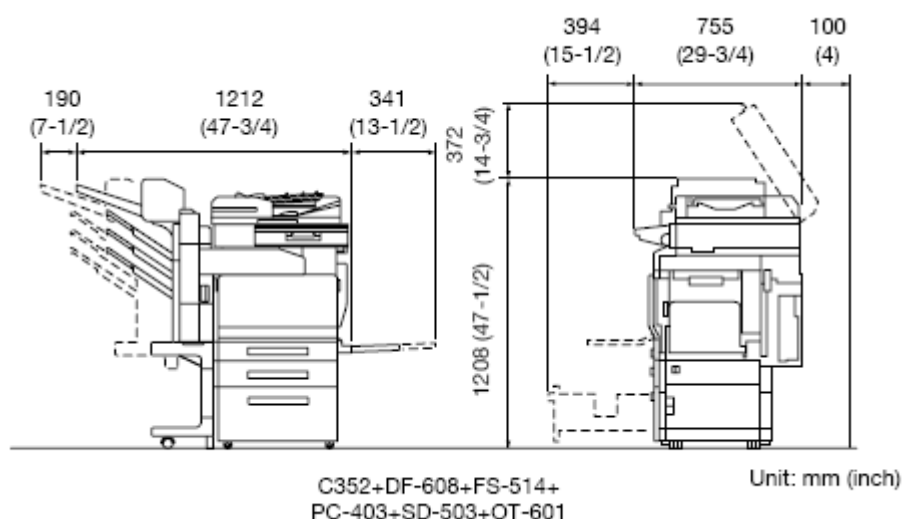

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

SYSTEM DIMENSIONS bizhub C352P

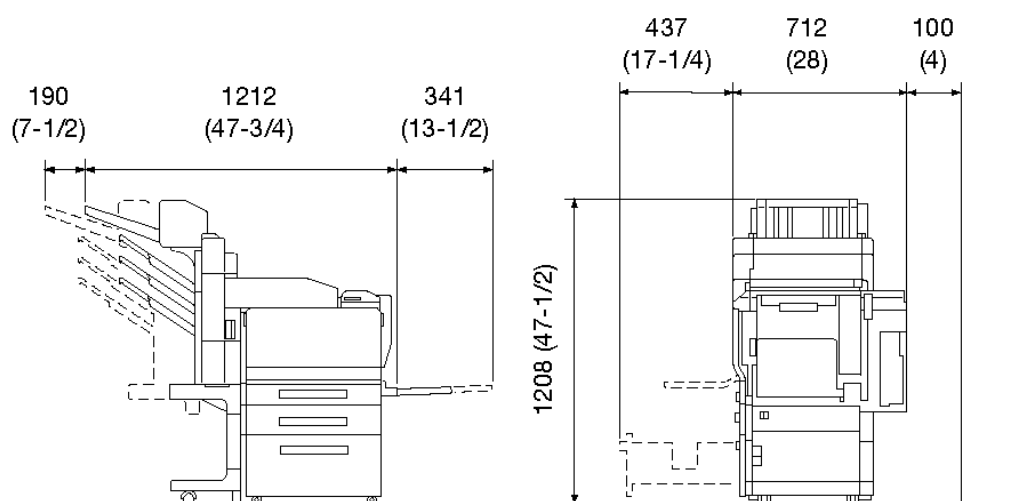


C352P+FS-514+PC-403+SD-503+OT-601

Unit: mm (inch)

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix




SYSTEM CONFIGURATION bizhubC352

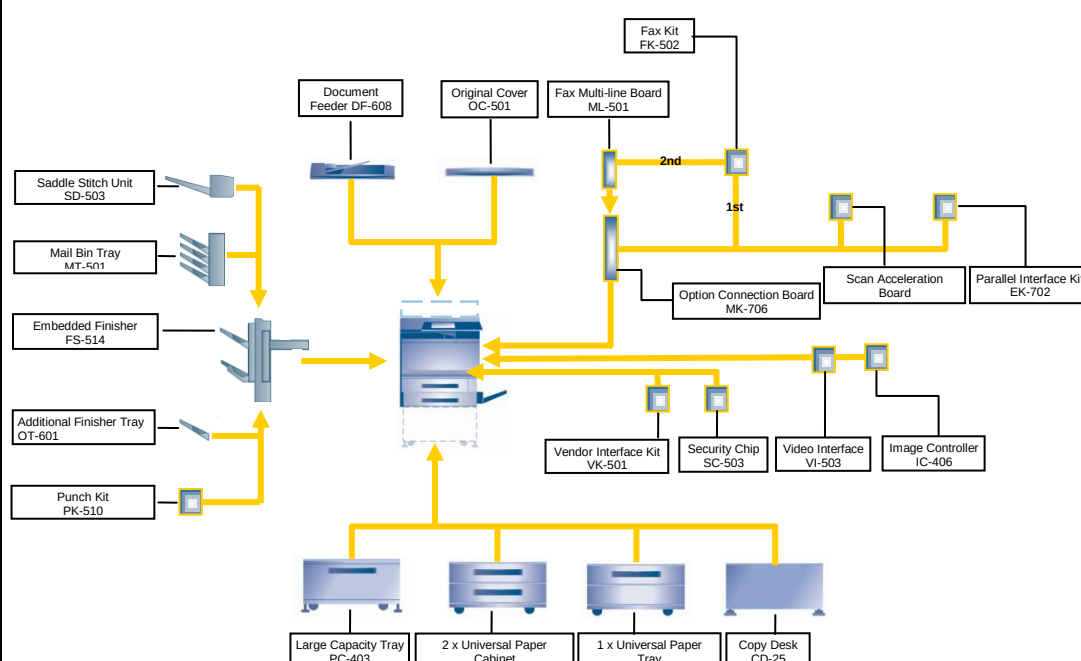

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix

SYSTEM CONFIGURATION bizhub C352P

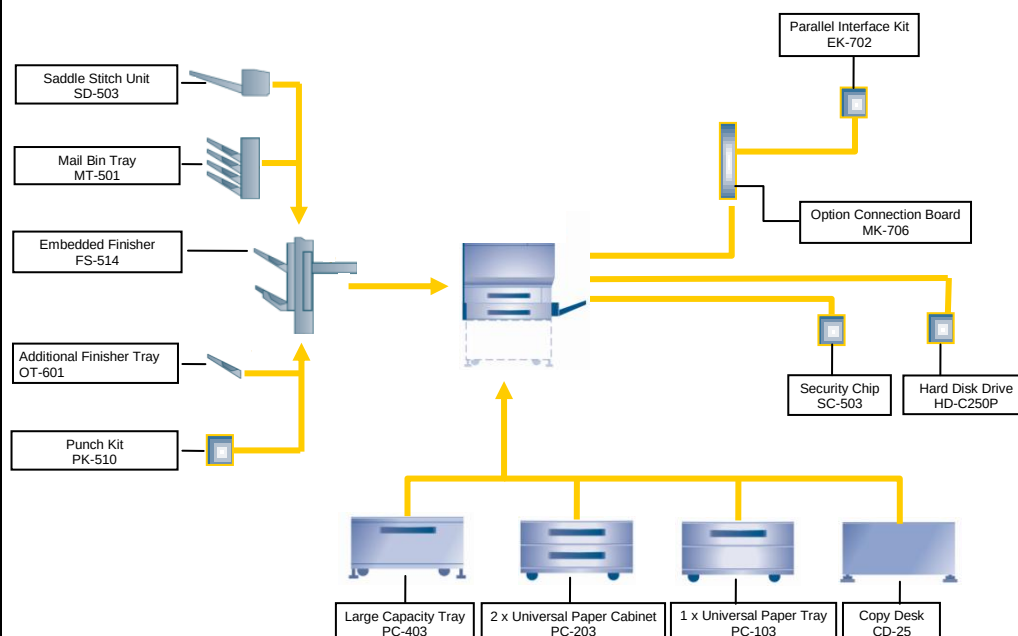

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix



System Specifications

DOCUMENT FEEDER (DF-608)		Option (not for C352P)	Product Basic
	Compatibility		Product Configuration
	Article Number		System Specifications
	Original Size		Copier Specifications
	Original Weight		Printer Specifications
	Tray Capacity		Scanner Specifications
	Feeding Type		Fax Specifications
	Feeding Speed		Consumables
	Dimensions (WxDxH) mm		Article Numbers
ORIGINAL COVER (OC-501)	Weight (kg)	Option (not for C352P)	Installation
			Maintenance
			Spare Parts
PAPER CASSETTES			Recommended Media
	Capacity		Appendix
	Paper Format		
	Paper Weight		
	Max. Paper Capacity		
PAPER CABINET (PC-103)		Option	
	Compatibility		
	Article Number		
	Capacity		
	Paper Format		
	Paper Weight		



PAPER CABINET (PC-103) cont.	Dimensions (WxDxH) (mm)	570 x 548 x 263	
	Weight (kg)	22	
	Remark	For plain paper only	
TWO WAY PAPER CABINET (PC-203)			Option
Compatibility	bizhub C250 / C300		
Article Number	4061 – 412		
Capacity	2 x 500 sheets universal (80 g/m ²)		
Paper Weight	60 – 90 g/m ²		
Paper Format	A5 – A3		
Dimensions (WxDxH) (mm)	570 x 548 x 263		
Weight (kg)	26		
Remark	For plain paper only		
LARGE CAPACITY CABINET (PC-403)			Option
Compatibility	bizhub C250 / C300		
Article Number	4061 – 712		
Capacity	2,500 sheets (80 g/m ²)		
Paper Format	A4 crosswise		
Paper Weight	60 – 90 g/m ²		
Dimensions (WxDxH) (mm)	570 x 564 x 263		
Weight (kg)	26		
Remark	For plain paper only		
COPY DESK CD-25			Option
Compatible	bizhub C250 / C300		
Article Number	9960 – 7200 - 00		

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix



DUPLEX UNIT (AD-503)	Compatible	bizhub C250P / C300	Standard	Product Basic
	Article Number	N / A		Product Configuration
	Capacity	Stackless (one sheet duplex)		System Specifications
	Paper Format	A5 lengthwise – A3FB+ (311 x 457 mm)		Copier Specifications
	Paper Weight	60 – 256 g/m ²		Printer Specifications
	Remark	Plain paper, Thick 1, 2, 3		Scanner Specifications
BYPASS	Capacity	100 sheets (80 g/m ²)	Standard	Fax Specifications
	Paper Format	A6 – A3+ (min. 90 x 140 mm, max. 311 x 457 mm) with automatic size detection Banner paper up to 1,200 x 297 mm		Consumables
	Paper Weight	Up to 256 g/m ²		Article Numbers
	Copy Media	Envelopes (refer to recommended media), OHP, thick paper		Installation
EMBEDDED FINISHER (FS-514)	Compatible	bizhub C250 / C300	Option	Maintenance
	Article Number	9J08 - 612		Spare Parts
	General Paper Weight	50 - 256 g/m ²		Recommended Media
	Finishing Modes	Non-sort, sort, group, sort & offset, group & offset, staple		Appendix
	Tray Capacity	Upper tray: 200 sheets (A4 / 80 g/m ²) Lower tray: 1000 sheets (A4 / 80 g/m ²)		
	Stapling Modes	Corner stapling, two position stapling		
	Stapling Capacity	50 sheets		
	Stapling Format	Corner 30 degrees (back, front), Corner Parallel (back, front), Parallel 2 points		
	Dimensions (WxDxH) (mm)	352 x 558 x 573		
	Weight (kg)	33.2		
	Remark	1 staple cartridge SK-602 is included For more details in regard to the capacity refer to the chapter "Appendix"		



ADDITIONAL FINISHER TRAY (OT-601)	Option Compatible FN-117, FS-508 Article Number 4625 – 241 Bin Capacity 200 sheets Remark For more details in regard to the capacity refer to the chapter “Appendix”	Product Basic Product Configuration System Specifications Copier Specifications Printer Specifications Scanner Specifications Fax Specifications Consumables Article Numbers Installation Maintenance Spare Parts Recommended Media Appendix
MAIL BIN TRAY (MT-501)	Option Compatible FN-117, FS-508 upper compatible Article Number 4510 – 612 Number of Bins 4 Bin Capacity 125 sheets each Dimensions (WxDxH) (mm) 624 x 503 x 390 Weight (kg) 8 Remarks Either Mail Bin Tray or Saddle Stitch Unit can be installed to FS-514	
SADDLE STITCH UNIT (SD-503)	Option Compatible bizhub C250 / C300 Article Number 4511 – 715 Folding Crease fold Paper Size A4 lengthwise / A3 Paper Weight 60 – 209 g/m ² Tray Capacity 200 sheets or 20 sets Stapling Modes Centre parallel 2 points Stapling Capacity 2 – 15 sheets Dimensions (WxDxH) (mm) Inside the transport section: 48 x 399 x 121 Staple Unit and Output Tray: 576 x 281 x 478 Weight (kg) 9.3 (inner and outer part together) Remark 1 staple cartridge MS – 2C is included in the kit Either Saddle Stitch Unit or Mail Bin Tray can be installed to FS-514	



PUNCH Kit (PK-510)	Compatible	bizhub C250 / C300	Option	Product Basic
	Article Number	4512 – 715 (European Version) 4512 – 717 (Swedish Version)		Product Configuration
	Number of Holes	4		System Specifications
	Paper Size	A5 – A3		Copier Specifications
	Paper Weight	50 – 209 g/m ²		Printer Specifications
	Dimensions (WxDxH) (mm)	114 x 461 x 136		Scanner Specifications
	Weight (kg)	1.9		Fax Specifications
IMAGE CONTROLLER (IC-406) [Fiery]	Compatible	bizhub C300	Option	Consumables
	Article Number	A006 - 202		Article Numbers
	Remark	For details please refer to the chapter “Printer Specifications”		Installation
VIDEO INTERFACE VI-503	Compatible	bizhub C300	Option	Maintenance
	Article Number	9J05 - 143		Spare Parts
	Remark	Required to connect IC-406		Recommended Media
256 MB MEMORY M-256	Article Number	9967 – 0001 - 25	IC-406 Option	Appendix
	Remark	Used for IC-406		
COLOR PROFILER KIT ES-1000	Compatible	No	IC-406 Option	
	Article Number	9967 – 0001 - 25		
DENSIOMETER X-RITE DTP34	Compatible	No	IC-406 Option	
	Article Number	9961 – 3620 - 00		



IMPOSE 2.6 SOFTWARE Used for Article Number	IC-406 Option IC-402 V2 / IC-405 / IC-406 9967 – 0002 - 27	Product Basic
		Product Configuration
SECURE ERASE Used for Article Number	IC-406 Option IC-402 V2 / IC-405 / IC-406 9967 – 0002 – 28	System Specifications
		Copier Specifications
HOT FOLDER Used for Article Number	IC-406 Option IC-402 V2 / IC-405 / IC-406 9967 – 0002 – 29	Printer Specifications
		Scanner Specifications
AUTO TRAPPING Used for Article Number	IC-406 Option IC-402 V2 / IC-405 / IC-406 9967 – 0002 – 30	Fax Specifications
		Consumables
HDD Compatible Article Number Capacity Functionality	Standard (bizhub C300) N / A 40 GB 1000 accounts / 1000 boxes / Font download	Article Numbers
		Installation
FAX KIT (FK-502) Compatible Article Number Function Remark	Option bizhub C250 / C351 / C300 / C450, bizhub 600 / 750 15LE Super G3 Fax board Requires MK-706 + MK-704 for installation	Maintenance
		Spare Parts
		Recommended Media
		Appendix



FAX MOUNT KIT (MK-704) Compatible Article Number Function Remark	bizhub C250 / C351 / C300 / C450, bizhub 600 / 750 4599 - 401 Interface board for FK-502. It contains backup memory (128 MB) and battery It is required to install FK-502	Option	Product Basic
			Product Configuration
			System Specifications
			Copier Specifications
			Printer Specifications
MULTI-LINE FAX KIT (ML-501) Compatible Article Number Remarks	bizhub C250 / C351 / C300 / C450 4599 – 641 Interface board for 2 nd fax board FK-502.	Option	Scanner Specifications
			Fax Specifications
			Consumables
OPTION CONNECTION BOARD (MK-706) Compatible Article Number Remark	bizhub C250 / C300 4599 - 471 Connection board for SA-501, FK-502, 2 nd fax and EK-702	Option	Article Numbers
			Installation
			Maintenance
SCAN ACCELERATION BOARD (SA-501) Compatible Article Number Remark	bizhub C250 / C351 / C300 / C450 4599 – 381 Faster scan processing, scan file printing from box	Option	Spare Parts
			Recommended Media
			Appendix
PARALLEL INTERFACE KIT (EK-702) Compatible Article Number Remark	bizhub C250 / C351 / C300 / C450 4599 - 372 Additional Parallel (IEEE1284) and USB interface for embedded print/scan controller. Either Parallel or USB can be utilised.	Option	
SECURITY CHIP (SC-503) Compatible Article Number	bizhub C250 / C351 / C300 / C450 4599 - 441	Option	



VENDOR INTERFACE KIT (VK-501)	Option		Product Basic
	Compatible	bizhub C250 // C350 / C351 / C300 / C450	Product Configuration
	Article Number	4599 - 235	System Specifications
	Remark	Connection interface for coin / card vendor devices	Copier Specifications
KEY COUNTER KIT 1	Option		Printer Specifications
	Compatible	bizhub C250 / C350 / C300 / C450	Scanner Specifications
	Article Number	4623 – 472	Fax Specifications
	Remark	The kit contains plastic cover, metal plate as holder and a cable. Counter and socket have to be ordered separately via the spare parts department. (Key Counter Art. No.9323160301, Socket Art. No.0704071302)	Consumables
			Article Numbers
			Installation
			Maintenance
			Spare Parts
			Recommended Media
			Appendix



Copier Specifications

GENERAL			Product Basic
Copy speed			Product Configuration
	B&W / Color A4 crosswise	35 / 35 cpm	System Specifications
	B&W / Color A4 lengthwise	25 / 25 cpm	Copier Specifications
	B&W / Color A3	17 / 17 cpm	Printer Specifications
	B&W / Color Duplex A4 crosswise	32 / 32 cpm	Scanner Specifications
	B&W / Color Duplex A4 lengthwise	15 / 15 cpm	Fax Specifications
	B&W / Color Duplex A3	12 / 12 cpm	Consumables
First copy			Article Numbers
	Color A4	8.5 sec.	Installation
	BW A4	6.5 sec.	Spare Parts
Multi Copy		1 – 999	Maintenance
Warm up time		less than 72 sec.	Recommended Media
Resolution	Copy	600 x 600 dpi (bizhub C352 only)	Appendix
	Print	1800 (equivalent) x 600 dpi	
	Scan	600 x 600 dpi (bizhub C352 only)	
	Fax	600 x 600 (bizhub C352 only)	
Gradation		256	
Exposure Type		Laser	
Memory			
	Image Memory	512 MB Work Memory + 512 MB File Memory standard	
	Memory Splitting	512 MB Work Memory + 512 MB File Memory + 128 MB Fax Memory (on MK-704) + 256 MB (EM-309) for JScribe	



Paper Format	A6 – A3	Product Basic
Printable Area max	305 x 449 mm	Product Configuration
Void Area	Leading Edge: 4.2 mm, Tailing Edge: 3.0 mm Left / Right Side: 3mm	System Specifications
Power Requirements	230 V 50/60 Hz, 8 A	Copier Specifications
Power Consumption	1500 W ± less than 10 %	Printer Specifications
Noise Level	Stand-by: 37 dBA Action: 62 dBA	Scanner Specifications
Dimensions (W x D x H) mm	bizhub C352: 650 x 748 x 771 (Standard w/o options) bizhub C352P: 648 x 711 x 601 (Standard w/o options)	Fax Specifications
Weight (kg)	bizhub C352: 103 (Standard w/o options) bizhub C352P: 100 (Standard w/o options)	Consumables
COPIER FUNCTIONALITY		Article Numbers
Original / Paper		Installation
Auto Original Detection	Color / BW	Maintenance
Auto Magnification Selection (AMS)	yes	Spare Parts
Auto Paper Size Selection (APS)	yes	Recommended Media
Auto Tray Switch	yes	Appendix
Magnification		
Zoom range	25 – 400 % (0.1 % steps)	
Zoom Preset	yes	
Zoom Program	yes	
XY Zoom	Yes / Autozoom / Centering	
Color Modes		
	Auto Color (ACS)	
	Full Color	
	Black	
	Two Color	
	Monotone	



Exposure Modes	Text	Product Basic
	Text / Photo (Printed Image / Photo Image)	Product Configuration
	Photo (Printed Image / Photo Image)	System Specifications
	Special Image Quality (Map / Copied Paper / Light Text)	Copier Specifications
	Copy Density Adjustment (Manual)	Printer Specifications
	Background Adjustment (Manual / Auto)	Scanner Specifications
	Glossy (Plain Paper in Simplex Mode only)	Fax Specifications
Creative Functions	OHP Interleaving / Cover Sheet / Chapter Insertion	Consumables
	Book Copy	Article Numbers
	Poster Mode (Multipage Enlargement)	Installation
	Image Repeat	Maintenance
	Mirroring	Spare Parts
	Negative / Positive	Recommended Media
	Background Color	Appendix
	Color Adjustment	
	Booklet Pagination	
	Page Margin / Page Erase	
Special Functions	Stamp – Time / Date, Page, Set	
	Copy and save in User Box	
	Booklet Fold Staple Centre Erase (10 mm erase)	
	Separate Scan (for more than 100 org.)	
	Page Combination 2/4/8 in 1	



Box	Box Functions	Public Box	Product Basic
		System Box	Product Configuration
		Confidential Document Box	System Specifications
		Box Name Search	Copier Specifications
		Reprint saved jobs	Printer Specifications
		Proof print saved jobs	Scanner Specifications
		Move to Box (other user box)	Fax Specifications
		Copy to Box (other user box)	Consumables
		Edit File Name	Article Numbers
		Combine Jobs (Copy / Print)	Installation
		Route Jobs (eMail / FTP / Fax / SMB)	Spare Parts
		Route Jobs File Type selection (JPG / TIF / PDF*)	Maintenance
			Recommended Media
			Appendix
		No. of Boxes	1000
Document per Box	max. 200		
Total Pages (all Boxes)	max. 9000		
Total Documents (all Boxes)	max. 3000		
Password	Up to 8 digits (alphanumeric)		
EKC / Authentication			
No. of Accounts / Users	999 + 1 public user		
User Name	Up to 8 digits (alphanumeric)		
Password	Up to 8 digits (alphanumeric)		
User Storage	Offline on MFP, Online by Windows Active Directory		



EKC / Authentication cont.	Permission Set	Color / BW Copy / Print / Scan / Fax / Box	Product Basic
	Volume Limitation	Color / BW by User or Group	Product Configuration
	Setup Software	PS Data Administrator	System Specifications
	Special Function	User List Display Password Only Function Password Free Public User	Copier Specifications
			Printer Specifications
Counter			Scanner Specifications
			Fax Specifications
			Consumables
			Article Numbers
			Installation
			Maintenance
			Spare Parts
			Recommended Media
			Appendix
	Copy	BW / Full Color / Single Color / 2 Color - Total / Large	
	Print	BW / Full Color / 2 Color - Total / Large	
	Scan	Income / Outgoing	
	Others	No. of Originals / No. of Prints / Duplex	
	Toner Coverage	Cyan / Magenta / Yellow / Black / pure Black	
	Mechanical Counter	Total	



Printer Specifications Emperon Controller

TYPE / Version	Embedded Emperon Controller / Version 3.20	Product Basic
CPU	64Bit MIPS RISC CPU IBM25PPC750FX-GR0133T [@600MHz]	Product Configuration
PRINT SPEED	35 / 35 ppm A4 (Color / BW crosswise) 17 / 17 ppm/A3	System Specifications
		Copier Specifications
		Printer Specifications
TANDEM PRINT FUNCTIONALITY	No	Scanner Specifications
PRINT RESOLUTION	1800 (equivalent) x 600dpi	Fax Specifications
MAX PRINTABLE AREA	305 x 449 mm	Consumables
PDL	PCL 5e/c, PCL6 (XL ver. 2.1) PostScript 3 emulation (3011)	Article Numbers
PRINT RAM	System memory of 1024MB	Installation
PRINT HDD	40 GB standard	Maintenance
FONTS	PCL: 80 fonts PS: 136 fonts	Spare Parts
		Recommended Media
		Appendix
INTERFACE		
	Parallel Yes (IEEE1284), optional	
	USB Yes 1.1 / 2.0 optional	
HOST INTERFACE		
	Ethernet 10BaseTX / 100BaseT	
	Parallel Port IEEE1284, 1.1 / 2.0 optional	
PROTOCOLS		
	IPX/SPX Yes	
	TCP/IP Yes	
	SMB Yes	
	LPD Yes	
	Pserver Yes (Novell 4.x, 5, 6 / NDS)	



PROTOCOLS cont.	IPP	Yes (v1.1)	Product Basic
			Product Configuration
PRINTER DRIVER	PCL6	Windows 98SE / Me Printer Driver	System Specifications
		Windows NT4.0 Printer Driver	Copier Specifications
		Windows 2000 / XP / XP64 Printer Driver	Printer Specifications
		Windows 2003 Server Printer Driver	Scanner Specifications
	PS	Windows 98SE / Me PS Printer Driver PPD File	Fax Specifications
		Windows NT4.0 PS Printer Driver	Consumables
		Windows 2000 / XP Printer Driver	Article Numbers
		Windows 2003 Server PS Printer Driver	Installation
	UNIX / Linux	Macintosh OS 9.2 / OS X Version 10.2 or later Printer Driver PPD File	Maintenance
		Yes (with UNIX/Linux filter)	Spare Parts
		- Sun Solaris 7, 8 and 9 (sparc and x86)	Recommended Media
		- Red Hat Linux 7.x, 8 and 9	Appendix
		- Red Hat Enterprise Linux 2.1 & 3 (x86)	
		- SuSe Linux 9.2 (x86)	



Software	
PageScope WebConnection	Resident on MFP – Internet Browser based status control and admin setting (Java based)
PageScope NetCare	Network based status control of all connected MFPs (including competitors)
PageScope Network Setup	Network based admin setup tool. Same functionality as admin area of WebConnection
PageScope Data Administrator	Network based utility to setup EKC, User Authentication and Scan Destinations
Box Operator	Client Userbox access tool
Direct Print Utility	Direct Print of PDF; TIFF; PCL and PS files. Hot Folder functionality
Print Status Notifier	Client utility giving print and PC fax status
Copy Protection Utility	Registration of Copy Protection patterns on the MFP
PageScope Workware	Trial version (30 days)



AUXILIARY FUNCTIONS	OHP Interleaving		Product Basic
	Chapter (PCL only)		Product Configuration
	User Authentication (User Name / Password up to 64 characters)		System Specifications
	Numbering (0 – 9999)		Copier Specifications
	Watermark (1 st page only / all pages, Normal / Bold / Italic / Bold Italic, 8 to 200 pt, 5 to 100 % density, Color: R / G / B)		Printer Specifications
	Form Overlay (PCL only)		Scanner Specifications
	Setting page by page (PCL only): Simplex, Duplex, Inserting white paper (PCL only), Paper Feeding Tray, Media Type Selection		Fax Specifications
	PC-Fax (200 / 400 / 600 dpi, designated time / date sending, Sub – Address / SID designation, Account Track, Cover Sheet, 100 sending address designation)		Consumables
	Confidential Print (Print ID / PW up to 8 characters)		Article Numbers
	Test Print		Installation
FINISHING	Box Storage (Box Number Designation: 1 to 999999999, Box Storage & Print)		Maintenance
	Copy Protection Print (PCL only)		Spare Parts
	Sorting	Yes	Recommended Media
	Stapling	Yes	Appendix
	Punching	Yes	
	Folding	Yes	
Cover Insertion (via Post Inserter)		No	
Trimming		No	
WHQL Compliant		Yes for both PCL6 and PS printer drivers. For Win2000, XP and 2003 Server	



Printer Specifications Fiery IC-406

Hardware	Type	Embedded X3e	Product Basic
	CPU	Intel Celeron 2.0GHz / 400MHz (FSB)	Product Configuration
	Memory	256MB - DDR400 (PC3200) Std. – Max 512MB	System Specifications
	OS	System 8e (Linux)	Copier Specifications
	Harddisk	80GB	Printer Specifications
Interface	Ethernet	Standard	Scanner Specifications
	TokenRing	No	Fax Specifications
	Parallel	No	Consumables
	USB	USB 2.0 (also utilised for Firmware update)	Article Numbers
Driver	PostScript	Adobe PostScript 3	Installation
		CPSI 3017	Maintenance
	PCL	PCL6c	Spare Parts
Software Utilities	Command WorkStation	Yes (V 4.5), [for Mac V 1.3]	Recommended Media
	Scan Box Utility	Yes	Appendix
	DocBuidler	Yes	
	FreeForm	Yes	
	Color Wise Pro Tools	Yes (V 3.2)	
	WebTools	Yes	
	DownLoader	Yes	
	Spooler	Yes	
	Twain Scan	Yes (Remote Scan 5.4)	



Software Utilities cont.		Product Basic
Remote Scan	Yes (Version 5.2)	Product Configuration
Graphic Arts Light Features	Yes (Option), SpotOn (std), AutoTrapping, HotFolder	System Specifications
Color Profiler	Yes (Option)	Copier Specifications
Impose (Doc Buidler Pro)	Yes (Option)	Printer Specifications
Konica Minolta MIB	Yes (Standard MIB III + KM printer MIB)	Scanner Specifications
CS Remote Care	Yes	Fax Specifications
PageScope Web Connection	Yes, routed to MFP via 2 nd Lan connection	Consumables
Features		Article Numbers
PPML (variable data database)	No	Installation
Load Balancing	Yes	Maintenance
Archiving	Yes	Spare Parts
Rip-While Print	Yes	Recommended Media
Fast Reprint	Yes	Appendix
Mixed Media	Yes	
Accounting	Yes	
Group Printing	Yes	
Secure Printing	Yes	
NetWork		
SNMP	Yes, 3.0	
NetWise	Yes	
Novell NDS compliant	Yes	
Netware Version	5.x or later	
Auto Switching Protocols	Yes	
Auto Port Switching	Yes	



Apple Talk	Yes	Product Basic
IPP	Yes	Product Configuration
Terminal Server	Yes	System Specifications
Point and Print	Yes	Copier Specifications
Click and Print	Yes (via SMB)	Printer Specifications
Port 9100	Yes	Scanner Specifications
LPR printing	Yes	Fax Specifications
IP-Filtering	Yes	Consumables
HTTPS	Yes	Article Numbers
SSL / TLS	Yes	Installation
User Authentication	Yes	Maintenance
DRIVERS	NT4.0 Win 98SE / ME 2000 / XP 2003	Spare Parts
OTHERS	Spot-on Std. (V 2) Auto Trap Std. Hot folder Std. (incl. Mac OS-X 10.x support) Secure Erase Yes	Recommended Media
		Appendix



Scanner Specifications

SCAN FUNCTIONS	Network TWAIN	Yes (via Ethernet TCP/IP)	Product Basic
	Scan to FTP	Yes	Product Configuration
	Scan to HDD (Box)	Yes	System Specifications
	Scan to email	Yes	Copier Specifications
	Scan to SMB	Yes	Printer Specifications
SCAN BASICS	Scanning Resolution	Push: 600 / 400 / 300 / 200 dpi Pull: 600 / 400 / 300 / 200 / 100 dpi	Scanner Specifications
	Scan Speed (with EDH)	Simplex Black 300 dpi: 65 opm A4 crosswise Simplex Color 300 dpi: 50 opm A4 crosswise Simplex Color 600 dpi: 41 opm A4 crosswise Duplex Color 600 dpi: 31 opm A4 crosswise	Fax Specifications
	Paper Size	Flatbed Scan: Max. A3 ADF Scan: Max. (W x L) 297 x 600 mm (less than 400 dpi) Max. (W x L) 297 x 432 mm (600 dpi)	Consumables
	Colour Scanning Capability	Yes	Article Numbers
	Color Mode	Auto Color / Full Color / Gray Scale / BW Binary	Installation
	Background Elimination	Auto / Manual	Maintenance
	Separate Scan Counter	Yes (TTL Scan counter)	Spare Parts
	Scan Format	TIFF, PDF, Compact PDF (basically same compression ratio than C250), JPEG, Encrypted PDF (setting by pages [each page / all pages])	Recommended Media
	Protocol	TCP/IP, (FTP, SMTP), SMB)	Appendix
	Interface	Ethernet 100Base-TX / 100Base-T	
	Coding (Compression)	MH, MR, MMR	
	Scanning Mode	8 modes Text, Photo (Printed Image), Photo (Photo Image), Text / Photo (Printed Image), Text / Photo (Photo Image), Light Text, Map, Copy Original	
SUPPORT OS		Windows98/SE/Me/NT4.0 SP6/2000/XP	



SCAN TO EMAIL	Protocol	SMTP	Product Basic
	Resolution	200x200, 400x400, 600x600 dpi.	Product Configuration
	Max. destinations	2000 + 100 groups (one touch dial in total)	System Specifications
	Image division	Yes (Off / On by Page or Size)	Copier Specifications
SCAN TO FTP	Protocol	FTP	Printer Specifications
	Resolution	200x200, 400x400, 600x600 dpi.	Scanner Specifications
	Max. destinations	2000 (one touch dial in total)	Fax Specifications
SCAN TO HDD (Box)	Resolution	200x200 (default), 400x400, 600x600 dpi.	Consumables
	Max. Mailbox (Scan to HDD)	1000 (max. box number)	Article Numbers
	Password protection	Yes (except Public mailbox).	Installation
			Maintenance
SCAN TO SMB	Protocol	SMB	Spare Parts
	Resolution	200x200, 300x300, 400x400, 600x600 dpi.	Recommended Media
UTILITIES	PageScope Workware	Yes trial version, but customer has to buy license for full support	
	Network FAX	Yes with PCL6c Driver	
	PageScope Data Administrator	Yes	



Fax Specifications

GENERAL DATA		<table><tr><td>Product Basic</td></tr><tr><td>Product Configuration</td></tr><tr><td>System Specifications</td></tr><tr><td>Copier Specifications</td></tr><tr><td>Printer Specifications</td></tr><tr><td>Scanner Specifications</td></tr><tr><td>Fax Specifications</td></tr><tr><td>Consumables</td></tr><tr><td>Article Numbers</td></tr><tr><td>Installation</td></tr><tr><td>Maintenance</td></tr><tr><td>Spare Parts</td></tr><tr><td>Recommended Media</td></tr><tr><td>Appendix</td></tr></table>	Product Basic	Product Configuration	System Specifications	Copier Specifications	Printer Specifications	Scanner Specifications	Fax Specifications	Consumables	Article Numbers	Installation	Maintenance	Spare Parts	Recommended Media	Appendix
Product Basic																
Product Configuration																
System Specifications																
Copier Specifications																
Printer Specifications																
Scanner Specifications																
Fax Specifications																
Consumables																
Article Numbers																
Installation																
Maintenance																
Spare Parts																
Recommended Media																
Appendix																
Protocol	Group 3 (compliant to ITU-T T.30) F-Code communication															
Min Transmission Time (seconds)	< 3 Sec. ITU-T V.34,JBIG (ITU No. 1)															
Max. Modem Speed / Compatibility	33,6 kbps / ECM, G3															
Coding / Error Correction (ECM)	MH, MR, MMR, JBIG / ECM															
Modulation Method	V27ter, V29, (V33), V17, V8 and V34															
Document Memory, Byte (max pages)	32 MB															
Memory Battery Buffered	60 hrs. (after 28 hrs. full charge) Life: Charging and discharging 5.000 times															
Dual Access (2channels)	Yes															
Dual Line	Yes – with ML-501 option and two FK-502)															
Remote Diagnostic	Yes with CS Remote Care															
Display/ Error Indicator	Yes															
DIALING																
Max. Numbers Stored	Abbreviated dial: 2000 (with HDD) One –touch dial: 400 (with HDD)															
Max. Phone Digits	38 digits															
Program Keys	Yes, 400 (with HDD).															
Group Setting (max.)	Yes, 100 (max. 500 destinations)															
Tone/Pulse Select	Yes / No															
PSTN-access by No/Earth Key/Flash	Yes / No / Yes (default: off, service function)															
Sub addressing	Yes															
Auto Redial/Last Number Redial	Yes / Yes (possible to select from five latest histories)															
Electronic Telephone Book Function	Yes															
Monitor Speaker	Yes.															



TRANSMISSION/INPUT		Product Basic
Transmission Resolution	200 x 100 dpi, 200 x 200 dpi, 400 x 400 dpi, 600 x 600 dpi	Product Configuration
Effective Scanning Width	Max. A3	System Specifications
Max. Size (W x L)	Flatbed: A3 ADF Scan: Max. 297 x 600 (Standard / Fine / Super Fine) Max. 297 x 432 (Ultra Fine, Manual TX-Mode)	Copier Specifications
Halftones	256 steps	Printer Specifications
Number of Timers	Max. 20	Scanner Specifications
Storable TX Jobs	Max. 99	Fax Specifications
ADF/Memory Transmission	Yes / Yes	Consumables
Book Scanner Transmission	Yes	Article Numbers
Header Line	Yes	Installation
Stamp Function	Yes	Maintenance
Department Management	Yes	Spare Parts
Closed Network/ Protected TX	Yes / Yes	Recommended Media
Quick Memory Transmission	Yes	Appendix
Batch Transmission	Yes	
2-to-1 Transmission	No	
2-Sided Transmission	No	
Cover Page Function	Yes (via PCL6 printer driver)	
Max. Broadcasting Locations	230 destinations	
Relay Broadcasting	Yes (using ITU subaddress function)	
Relay Broadcast Command	Yes (using ITU subaddress function)	
Transmission Resolution	200 x 100 dpi, 200 x 200 dpi, 400 x 400 dpi, 600 x 600 dpi	



RECEIVING/OUTPUT		Product Basic
Receiving Resolution	203 x 98 dpi, 203 x 196 dpi, 406 x 392 dpi	Product Configuration
Effective Print Width (fax mode)	A4 (3±2 mm margin)	System Specifications
Smoothing	Yes, for 203 x 98 dpi only	Copier Specifications
Auto/Manual Reception	Yes/Yes	Printer Specifications
Storable RX Jobs	Max. 250	Scanner Specifications
Reduction in Fax Mode	Yes	Fax Specifications
Paper source selection	Yes	Consumables
Receiving/Output Tray Selection	NO	Article Numbers
Memory Receiving	Yes	Installation
Footer Print	Yes	Maintenance
Closed Network RX/ Protected RX	No/Yes (block Junk Fax)	Spare Parts
2 to 1 Receiving	Yes (A5/2 pages => A4/1 page)	Recommended Media
Duplex Reception	Yes	Appendix
RX-Memory Print by Password	Yes (Security reception)	
Forward Function (Fax Gateway)	Yes (fax number and Box, in Phase 2 also to e-Mail)	
Max. Polling Locations	Max. 230	
Selective/Protected Polling	Yes (ITU sub-address) / Yes (ITU sub-address)	
Memory Polling (Database Polling)	Yes	



REPORTS AND LISTS	Telephone List	Yes	Product Basic
	Key Setting List	Yes (Soft key: Included in machine setting list)	Product Configuration
	Transmission Report	Yes.	System Specifications
	Reception Result Report	Yes	Copier Specifications
	Reservation Report	Yes (Command List)	Printer Specifications
	Broadcast Report	Yes (Transmission Confirmation Report)	Scanner Specifications
	Error Report	Yes (Transmission Confirmation Report)	Fax Specifications
	Machine Status List	Yes (Machine Setting List)	Consumables
	Journal	Yes	Article Numbers
	Consumable Order Report	Yes (default: off, service function)	Installation
	Memory Data List/Print	Yes (Stored Document List)	Maintenance
	User/Department Management List	Yes	Spare Parts
			Recommended Media
UTILITIES			Appendix
	PageScope Data Administrator	Yes (for programming fax recipients)	
INTERNET FAX	Communication Protocol	Transmission: SMTP Reception: POP3, TCP/IP	
	Communication Mode	Full mode	
	Original Size	A3, B4, A4	
	Recording Size	Max A3 (max. A3 long size original: 1000 mm with document feeder)	
	Interface	Ethernet 100Base-T/100Base-TX	
	Resolution	200 x 100 dpi, 200 x 200 dpi, 400 x 400 dpi, 600 x 600 dpi	
	Format	Transmission: TIFF-S Reception: TIFF-F	
	Server Software	[TBD] Send mail Postfix Qmail	
	Scan to Internet Fax	TIFF (MH, MR, MMR with B/W 1 bit, 200 x 100, 200 x 200, 400 x 400 dpi (full mode))	

Note: Specification may vary due to national PTT regulations

Status: 05.05.2006

Version: 1.2

Konica Minolta Business Solutions Europe GmbH

Product Marketing Division

Office Marketing Group

Page 33



Consumables

TONER CARTRIDGE (BK)	Compatibility	bizhub C300	Product Basic
	Article-No.	8938 - 705	Product Configuration
	Name	TN-312	System Specifications
	Concept	Cartridge system	Copier Specifications
	Weight	430 g	Printer Specifications
	Yield	20 k	Scanner Specifications
	Units per carton	1 cartridge	Fax Specifications
			Consumables
TONER CARTRIDGE (Y, M, C)	Compatibility	bizhub C300	Article Numbers
	Article-No.	Yellow: 8938 - 706 Magenta: 8938 - 707 Cyan: 8938 - 708	Installation
	Name	TN-312	Maintenance
	Concept	Cartridge system	Spare Parts
	Weight	260 g	Recommended Media
	Yield	12 k each	Appendix
	Units per carton	1 cartridge	
IMAGING UNIT (BK)	Compatibility	bizhub C300	
	Article-No.	4062 - 223	
	Name	IU-311	
	Yield	70 k	
	Units per carton	1 Unit	



IMAGING UNIT (Y, M, C)	Compatibility	bizhub C300	Product Basic
	Article-No.	Yellow: 4062 - 323 Magenta: 4062 - 423 Cyan: 4062 - 523	Product Configuration
	Name	IU-311	System Specifications
	Yield	45 k	Copier Specifications
	Units per carton	1 Unit	Printer Specifications
			Scanner Specifications
STAPLE CARTRIDGE FOR FS-514	Compatibility	FS-504	Fax Specifications
	Article-No.	14YK	Consumables
	Name	SK-602	Article Numbers
	Quantity per Sales Unit	3 x 5000 staples	Installation
STAPLE CARTRIDGES FOR SD-503	Compatibility	SK-1	Maintenance
	Article-No.	4599 – 161	Spare Parts
	Name	MS – 2C (MAXX)	Recommended Media
	Quantity per Sales Unit	4 x 2000 staples	Appendix
WASTE TONER BOX	Article No.	4065 - 611	
	Yield	25 k copies	



Article Numbers

MACHINE			Product Basic
	bizhub C352	9J06 - 211	Product Configuration
	bizhub C352P	9J06 - 201	System Specifications
ACCESSORIES			Copier Specifications
	Document Feeder DF-608	9J07 – 612 (not for C352P)	Printer Specifications
	Original Cover OC-501	4599 – 321 (not for C352P)	Scanner Specifications
	Paper Cabinet PC-103	4061 - 512	Fax Specifications
	Paper Cabinet PC-203	4061 - 412	Consumables
	Large Capacity Tray PC-403	4061 - 712	Article Numbers
	Copy Desk CD-25	9960 – 7200 - 00	Installation
	Embedded Finisher FS-514	9J08 - 612	Maintenance
	Additional Finisher Tray OT-601	4625 – 241	Spare Parts
	Mail Bin Tray MT-501	4510 - 712	Recommended Media
	Saddle Stitch Unit SD-503	4511 - 715	Appendix
	Punch Unit PK-510	4512 – 715 (European Version)	
	Punch Unit PU-501	4512 – 717 (Swedish Version)	
	Image Controller IC-406	A006 – 202 (not for C352P)	
	Video Interface VI-503	9J05 – 143 (not for C352P)	
	256 MB Memory M-256 for IC-406	9967 – 0001 - 25	
	Color Profiler Kit ES-1000	9967 – 0000 - 08	
	Densitometer X-RITE DTP34	9961 – 3620 - 00	
	Impose 2.6 Software	9967 – 0002 - 27	
	Secure Erase	9967 – 0002 - 28	
	Hot Folder	9967 – 0002 - 29	
	Auto Trapping	9967 – 0002 - 30	



ACCESSORIES cont.	40 GB Data Drive HD-C250P	9967 – 0001 – 83 (for C352P only)	Product Basic
	Fax Kit FK-502	15LE (not for C352P)	Product Configuration
	Multi-line Fax Kit ML-501	4599 – 641 (not for C352P)	System Specifications
	Stamp Unit Fax SP-501	4614 – 506 (not for C352P)	Copier Specifications
	Replacement Stamp	4614 – 511 (not for C352P)	Printer Specifications
	Option Connection Board MK-706	4599 - 471	Scanner Specifications
	Vendor Interface Kit VK-501	4599 – 235 (not for C352P)	Fax Specifications
	Scan Acceleration Board SA-501	4599 – 381 (not for C352P)	Consumables
	Parallel Interface Kit EK-702	4599 – 372 (not for C352P)	Article Numbers
	Security Chip SC-503	4599 - 441	Installation
	Key Counter Kit 1	4623 - 472	Maintenance
CONSUMABLES	Imaging Unit I / U (BK)	4062 - 223	Spare Parts
	Imaging Unit I / U (Y)	4062 - 323	Recommended Media
	Imaging Unit I / U (M)	4062 - 423	Appendix
	Imaging Unit I / U (C)	4062 - 523	
	Toner Cartridge (BK)	8938 - 705	
	Toner Cartridge (Y)	8938 - 706	
	Toner Cartridge (M)	8938 - 707	
	Toner Cartridge (C)	8938 - 708	
STAPLES	SK-602 Staples for FS-514	14YK	
	Staples MS-2C for SD-503	4599 – 161	



WASTE TONER BOX Waste Toner Box 4065 - 611	Product Basic
	Product Configuration
	System Specifications
	Copier Specifications
	Printer Specifications
	Scanner Specifications
	Fax Specifications
	Consumables
	Article Numbers
	Installation
	Maintenance
	Spare Parts
	Recommended Media
	Appendix



DOCUMENTATION	Language	Art. No.		Remarks	Product Basic
User Manual bizhub C352	GB	9961 – 0355 - 00	✓	User Manuals for Printing, Scanning and User Box Utility are part of the Copier User Manual. Those Manuals are available on CD only in all languages which are available for the Copier Manual.	Product Configuration
	D	9961 – 0355 - 01	✓		System Specifications
	F	9961 – 0355 - 02	✓		Copier Specifications
	E	9961 – 0355 - 03	✓		Printer Specifications
	I	9961 – 0355 - 04	✓		Scanner Specifications
	P	9961 – 0355 - 05	✓		Fax Specifications
	NL	9961 – 0355 - 06	✓		Consumables
	DK	9961 – 0355 - 07	✓		Article Numbers
	S	9961 – 0355 - 08	✓		Installation
	N	9961 – 0355 - 09	✓		Maintenance
	FIN	9961 – 0355 - 10	✓	A Driver CD for Printing, Scanning and User Box Utility will be made available separately. The Article Number for this multilingual CD is 9968 - 0352 - 99	Spare Parts
	GR	9961 – 0355 - 11	✓		Recommended Media
	TR	9961 – 0355 - 13	✓		Appendix
	CZ	9961 – 0355 - 15	✓		
	H	9961 – 0355 - 18	✓		
	PL	9961 – 0355 - 21	✓		
	RO	---	X		
	RUS	9961 – 0355 - 23	✓		
	SK	9961 – 0355 - 24	✓		



DOCUMENTATION	Language	Art. No.		Remarks	Product Basic
Operator's Manual Fax Kit FK-502	GB	9968 – 0503 - 99	✓	For the time being for C-352 only the English manual is available. The other languages are still under preparation.	Product Configuration
	D		✓		System Specifications
	F		✓		Copier Specifications
	E		✓		Printer Specifications
	I		✓		Scanner Specifications
	P		✓		Fax Specifications
	NL		✓		Consumables
	DK		✓		Article Numbers
	S		✓		Installation
	N		✓		Maintenance
	FIN		✓	Later on all marked languages are on one CD, which will be distributed with every fax kit.	Spare Parts
	GR		✓		Recommended Media
	TR		✓		Appendix
	CZ		✓		
	H		✓		
	PL		✓		
	RO		X		
	RUS		✓		
	SK		✓		




DOCUMENTATION	Language	Art. No.		Remarks	Product Basic
Face Sheets / Labels bizhub C352	GB	9967 – 0450 - 00	✓	Same Face Sheets and Labels as for bizhub C250 / C351 / C450	Product Configuration
	D	9967 – 0450 - 01	✓		System Specifications
	F	9967 – 0450 - 02	✓		Copier Specifications
	E	9967 – 0450 - 03	✓		Printer Specifications
	I	9967 – 0450 - 04	✓		Scanner Specifications
	P	9967 – 0450 - 05	✓		Fax Specifications
	NL	9967 – 0450 - 06	✓		Consumables
	DK	9967 – 0450 - 07	✓		Article Numbers
	S	9967 – 0450 - 08	✓		Installation
	N	9967 – 0450 - 09	✓		Maintenance
	FIN	9967 – 0450 - 10	✓		Spare Parts
	GR	9967 – 0450 - 11	✓		Recommended Media
	TR	9967 – 0450 – 13	✓		Appendix
	CZ	9967 – 0450 – 15	✓		
	H	9967 – 0450 – 18	✓		
	PL	9967 – 0450 – 21	✓		
	RO	---	X		
	RUS	9967 – 0450 – 23	✓		
	SK	9967 – 0450 – 24	✓		
Service Manual bizhub C352	GB	distributed to the countries	✓	Service Manual Machine & Options (CD)	
	D		✓	Service Manual Maschine & Zubehör (CD)	



DOCUMENTATION	Language	Art. No.		Remarks	Product Basic
User Manual bizhub C352P	GB	9961 – 0356 - 00	✓		Product Configuration
	D	9961 – 0356 - 01	✓		System Specifications
	F	9961 – 0356 - 02	✓		Copier Specifications
	E	9961 – 0356 - 03	✓		Printer Specifications
	I	9961 – 0356 - 04	✓		Scanner Specifications
					Fax Specifications
					Consumables
					Article Numbers
					Installation
					Maintenance
					Spare Parts
					Recommended Media
					Appendix

Installation

Outline of the installation procedure

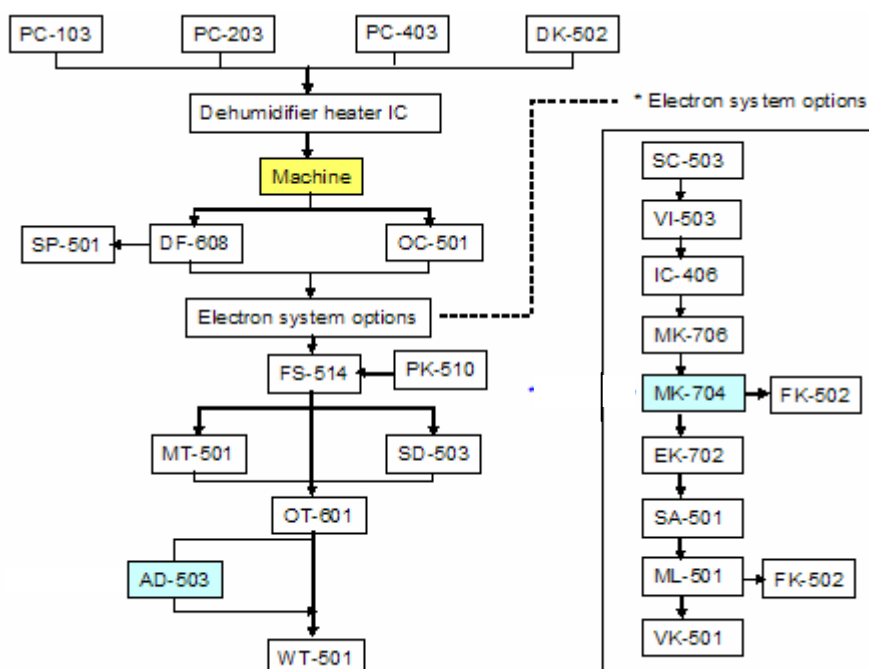

When installing the machine and associated options as a system, follow the order shown on the upper.

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix



C300 / C352 detailed installation time

Part 1

	Main body	Copy Cabinet	DUP	EDH	Finisher
Installation rate assumption	—	80%(3Item)	Std.	85%/95%	20%/60%
Unpacking	0:01:52	0:01:03	0:00:34	0:01:00	0:04:35
Setup	0:15:26	0:08:17	0:04:57	0:15:49	0:15:45
Adjustment	0:31:09	0:03:34	0:12:18	0:09:59	0:02:00
Subtotal	0:48:27	0:12:54	0:17:49	0:26:48	0:22:20
Total	0:22:00			0:02:00	0:11:00

Part 2

Saddle Unit	Punch kit	FAX Kit	Option mount kit	FAX	Dehumidification heater
12%/45%	7%/25%	Std./25%	Std./40%	65%/25%	Std./-
0:00:58	0:00:45	0:00:30	0:00:30	0:01:00	—
0:16:15	0:07:57	0:25:51	0:24:15	0:02:35	—
0:20:15	0:13:54	—	—	—	—
0:37:28	0:22:36	0:26:21	0:24:45	0:03:35	0:28:00
0:02:30	0:01:00	0:03:00	23:02:00	0:02:00	—

* Installation rate of Saddle unit and Punch Kit is as for option of Finisher.

C300 / C352 Standard System	Standard + Punch Kit	Standard + Punch Kit + Fax + Fax / OP Kit
03:05:27	03:29:03	3.30:40

* Reference system: Main body + paper feed cabinet + DUP + ADFR + Finisher

Definition of the installation time

Installation time is defined by total time of the following four items.

Installation time is defined as one person did.

In case of carrying device that more than one person is needed, define as one person did.

Category	Job to do
Unpacking	Time for unpack the carton box, and take the device out.
Setting-up	Time for removing packing materials such as fixing blackest/Tape till making first copy. In case of option, removing packing materials till attach to main body.
Adjustment/Setting	Adjustment and Setting advised on the Install Manual. e.g. - Serial Number input - Gradation Adjust - Date/Time - Paper alignment
Discarding packing materials	Separate packing materials, collect them to make ready for discarding

* Travel Time, Carrying machine into the customer premises, placing, connect to Network and product introduction to the customer is not included.

Maintenance

Firmware Updating procedure


1. Firmware Updating is done by CF card that rewriting the RAM on the PW Board. CF card is available as a spare part. This CF card can be rewritable when newer firmware is released. For rewriting, "Cygwin" is needed to do it.

Note: See Service Manual about the updating procedure.


2. Internet ISW for updating the firmware at remote location. See the service manual.

Other service tools

Adjustment for gap between glass and original



Skew adjustment chart bundled with DF



Test chart for adjusting original reading position



* The above-mentioned service tool can be ordered as a spare part.

* Refer to details to the service manual.

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix



Panel tools for printer version

When the service function of C352P is used, the following treatment devices are needed.

Name	Purpose/Recommendation	Note
Notebook PC	OS Win98/2000/XP	On the market
Simulation software	For Setting, Adjusting and Verifying via PC display.	Download from CSES
Straight Cable	Connect between PC and Selector Port C	On the market
Selector	Connect among PC + Printer + X-Rite (Aluminium Tape required)	On the market
X-Rite	For verifying colour density	On the market
Cross Cable(For DTP32)	Connect between Selector and X-Rite	On the market
Cross Cable	Connect between Selector port A and Printer	On the market

*Refer to details to the C352P service manual.

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix



Service Support Tools

CSRC

- CS Remote Care: System that acquires data of machines at remote locations. Following data can be sent from device to center host server.
 - Urgent notification (Error code, JAM, toner empty, periodical check)
 - Machine management data collection
 - Application
 - - ✧ Basic meter reading, Jam counter, Trouble counter, Warning counter
 - ✧ Parts Life counter
 - ✧ Firmware version
- Status of introduction and usage of CSRC in the Sales HQs, ask directly to the person in charge in the HQs.

Device Side		C352	C300
		Rhein2	Rhein2.5
Function	Interface	Color 35/35	Color 30/30
CS Remote Care	RS-232C (modem)	Supported	Supported
	NIC on body (e-mail)	Supported	Supported
	NIC on IP controller (e-mail)	Supported	Supported
	FAX Line	From Phase2.5 (Release time : TBD)	From Phase2.5 (Release time : TBD)

CS Remote Care Application Side

Web Application		Supported	Supported
Local Application	Maintenance Tool	Supported	Supported
	Meter Reading Tool	Not Supported	Not Supported
	Parts Life MNG Tool	Not Supported	Not Supported

CSRC Host information data for C352/C300 will be released in the same time of releasing main unit.

* There is a functionality that periodically notifies the total counter from main unit. It is not the functionality of CSRC.

Product Basic
Product Configuration
System Specifications
Copier Specifications
Printer Specifications
Scanner Specifications
Fax Specifications
Consumables
Article Numbers
Installation
Maintenance
Spare Parts
Recommended Media
Appendix



Recommended Spare Parts with PM Parts

Engine

Parts Name	Part #	PM	Qty / unit	Rec. Qty.	Other Models	Product Basic
FUSING UNIT (220-240V)	9J06-R707-00	300K	1	5		Product Configuration
TRANSFER KIT	9J06-R704-00	120K	1	5		System Specifications
BOTTLE ASSY (Waste Toner)	4065-611	30K	1	25	bizhub C250/C250P	Copier Specifications
ROLLER ASSY (2 nd Cassette)	4030-0151-01	300K	1	5	bizhub C250/C250P bizhubC450	Printer Specifications
ROLLER PICK-UP (2 nd Cassette)	4030-3005-01	300K	2	5	bizhub C250/C250P bizhubC450	Scanner Specifications
ROLLER ASSY SEPARATE (MP Cassette)	4034-0151-01	200K	1	5	bizhub C250/C250P bizhub 180/210	Fax Specifications
ROLLER ASSY SEPARATE (MANUAL FEED)	4034-0151-01	200K	1	5	bizhub C250/C250P bizhub 180/210	Consumables
ROLLER PICK-UP (MP Cassette)	4034-3012-01	200K	1	5	bizhub C250/C250P bizhub 180/210	Article Numbers
ROLLER PICK-UP (MANUAL FEED)	4131-3001-01	200K	1	5	bizhub C250/C250P bizhub 180/210	Installation
P/H ASSY	9J06-R727-00		1	5		Maintenance
PWB ASSY PWB-D	4038-0105-03		1	5		Spare Parts
PWB ASSY PWB-IC (of C352/C300)	4038-0115-01		1	5	bizhub C250/C250P	Recommended Media
PWB ASSY PWB-SIF	4038-0123-03		1	5	bizhub C250/C250P	Appendix
CONTROLL PANEL ASSY UN201 (of C352/C300)	4038-6053-04		1	5	bizhub C250/C250P	
CONTROLL PANEL ASSY UN1 (of C352P)	4038-6057-03		1	5	bizhub C250/C250P	
PHOTO SENSING ELEMENT (SE1/SE2)	9372-1300-12		2	5	bizhub C250/C250P	
ROLLER ASSY	9J06-R712-00		1	5		
PWB ASSY PWB-M (of C352/C352P)	9J06-0101-02		1	5		
PWB ASSY PWB-M (of C300)	9J06-H003-01		1	5		
PWB ASSY PWB-C (of C352/C300)	9J06-0113-02		1	5		
PWB ASSY PWB-MFPC	9J06-0121-03		1	5		
FIRST SLIDER ASSY (of C352/C300)	9J06-R720-00		1	5		



LENS/CCD ASSY (of C352/C300)	9J06-R721-00		1	5	
LAMP (of C352/C300)	9351-3300-11		1	5	
HARD DISK DRIVE	9J06-M700-00		1	5	

Options

DF-608

Parts Name	Part #	PM	Qty / unit	Rec. Qty.	Other Models
FEED ROLLER	4030-3005-01	200K	1	5	bizhub C250/C250P
PWB ASSY PWB-A	9J07-0101-02		1	5	
PWB ASSY PWB-C	9J07-0103-01		1	5	
PWB ASSY PWB-IC	9J07-0104-01		1	5	
PICK UP ROLLER	9J07-3301-01	200K	2	5	
SEPARATOR ROLLER	9J07-3409-01	200K	1	2	

PC-103, PC-203 PC-403

Parts Name	Part #	PM	Total Qty.	Rec. Qty.	Other Models
SEPARATOR ROLLER ASSY (PC-103, PC-203, PC-403)	4030 0151 01	300K	3	15	PC-101/201, PF-124/210 / PF-122/PC-102/PC-202/PC-402
TAKE-UP ROLLER (PC-103, PC-203, PC-403)	4030 3005 01	300K	8	15	PC-101/201, PF-124/210 / PF-122/PC-102/PC-202/PC-402
PWB ASSY (PWB-C2 PF) (PC-103, PC-203)	4348 0104 02		1	10	PC-101/201/PC-102/PC-202
PWB ASSY (PWB-C1 LCT) (PC-403)	4348 0101 05		1	5	PC-401/PF-122/PC-402

Product Basic

Product Configuration

System Specifications

Copier Specifications

Printer Specifications

Scanner Specifications

Fax Specifications

Consumables

Article Numbers

Installation

Maintenance

Spare Parts

Recommended Media

Appendix



SD-503

Parts Name	Part #	Qty / unit	Rec. Qty.	Other Models
PWB-C	4511-0101-05	1	5	New

FS-514

Parts Name	Part #	Qty / unit	Rec. Qty.	Other Models
PWB-A	9J08-0101-01	1	5	New

MT-501

Parts Name	Part #	Qty / unit	Rec. Qty.	Other Models
PWB-A MK	4510-5110-01	1	5	

AD-503

Parts Name	Part #	Qty / unit	Rec. Qty.	Other Models
PWB-A	4066 0101 01	1	5	

FK-502

Parts Name	Part #	Qty / unit	Rec. Qty.	Other Models
PWB FAX	15LA-9010	1	5	bizhub C250/C250P
PWB NCU 220 – 240 Volt	15LE-9020	1	5	bizhub C250/C250P

Product Basic

Product Configuration

System Specifications

Copier Specifications

Printer Specifications

Scanner Specifications

Fax Specifications

Consumables

Article Numbers

Installation

Maintenance

Spare Parts

Recommended Media

Appendix



Recommended Media

Paper	Manufacturer	Article Number	Product Basic
Konica Minolta Color +	Mondi 90 g/m ² A4	9966 – 1310 - 00	Product Configuration
Konica Minolta Color +I	Mondi 90 g/m ² A3	9966 – 1300 - 00	System Specifications
Konica Minolta Original	Mondi Triotec 80 g/m ² A4	9966 – 1200 - 00	Copier Specifications
Konica Minolta Original	Mondi Triotec 80 g/m ² A3	9966 – 1210 - 00	Printer Specifications
Color Copy	Mondi 100 / 120 / 160 / 200 / 220 / 250 g/m ²	---	Scanner Specifications
RCC 80 Recycling Paper	Steinbeis-Temming 80 g/m ² A4	---	Fax Specifications
OHP Films			Consumables
CG-3700	3M	9967 – 0000 - 11	Article Numbers
ENVELOPS			Installation
Distinction 100 weiss	Schneider & Söhne (100 g/m ² , 110 x 221 mm)	---	Maintenance
For more details please refer to the InfoHub "Recommended Copy / Print Media for Konica Minolta Digital Systems".			Spare Parts
			Recommended Media
			Appendix



Appendix

Compatibility of Accessories			Product Basic
Accessories for bizhub C300 / C352 / P	Color Models	B / W Models	Product Configuration
Document Feeder DF-608	---	---	System Specifications
Original Cover OC-501	bizhub C350	---	Copier Specifications
Paper Cabinet PC-103	bizhub C250	---	Printer Specifications
Paper Cabinet PC-203	bizhub C250	---	Scanner Specifications
Large Capacity Tray PC-403	bizhub C250	---	Fax Specifications
Copy Desk CD-25	bizhub C250	---	Consumables
Embedded Finisher FS-514	bizhub C250	---	Installation
Add. Finisher Tray OT-601	bizhub C250	bizhub 250 / 350	Maintenance
Mail Bin Tray MT-501	bizhub C250	bizhub 250 / 350 upper compatible	Spare Parts
Saddle Stitch Unit SD-503	bizhub C250	---	Recommended Media
Punch Kit PK-510	bizhub C250	---	Appendix
Image Controller IC-406	---	---	
Fax Kit FK-502	bizhub C250 / C351 / C450	bizhub 600 / 750	
Multi-line Fax Kit ML-501	bizhub C250 / C351 / C450	---	
Video Interface VI-503	---	---	
Option Connection Board MK-706	bizhub C250	---	
40 GB HDD HD-C250P	C250P	---	
Parallel Interface Kit EK-702	bizhub C250 / C351 / C450	---	
Scan Acceleration Board SA-501	bizhub C250 / C351 / C450	---	



Compatibility of Accessories / Consumables			Product Basic
Accessories for bizhub C300 / C352 / P	Color Models	B / W Models	Product Configuration
Vendor Interface Kit VK-501	bizhub C250 / C350 / C351 / C450	----	System Specifications
Security Chip SC-503	bizhub C250 / C351 / C450	---	Copier Specifications
Key Counter Kit 1	bizhub C250 / C350 / C450	---	Printer Specifications
			Scanner Specifications
Consumables			Fax Specifications
I / U (BK)	bizhub C300	N / A	Consumables
I / U (Y)	bizhub C300	N / A	Article Numbers
I / U (M)	bizhub C300	N / A	Installation
I / U (C)	bizhub C300	N / A	Maintenance
T / C (BK)	bizhub C300	N / A	Spare Parts
T / C (Y)	bizhub C300	N / A	Recommended Media
T / C (M)	bizhub C300	N / A	Appendix
T / C (C)	bizhub C300	N / A	



Maximum paper capacity of FS-514 with different configurations					Product Basic
	Total Capacity	Non-Sort / Sort / Group	Sort Staple	Saddle Staple	Product Configuration
1 st Tray	1200 sheets A4	200 sheets	200 sheets or 20 sets		System Specifications
2 nd Tray (A4 / B4 or A3)		1000 sheets	500 / 250 sheets or 50 / 25 sets		Copier Specifications
1 st Tray	900 sheets A4	200 sheets	200 sheets or 20 sets		Printer Specifications
2 nd Tray (A4 / B4 or A3)		500 / 250 sheets	500 / 250 sheets or 50 / 25 sets		Scanner Specifications
Additional Finisher Tray		200 sheets	200 sheets or 20 sets		Fax Specifications
1 st Tray	900 sheets A4	200 sheets	200 sheets or 20 sets		Consumables
2 nd Tray (A4 / B4 or A3)		500 / 250 sheets	500 / 250 sheets or 50 / 25 sets		Article Numbers
Saddle Stitch Unit				200 sheets or 20 sets	Installation
1 st Tray	800 sheets A4	200 sheets	200 sheets or 20 sets		Maintenance
2 nd Tray (A4 / B4 or A3)		200 / 100 sheets	200 / 100 or 20 / 10 sets		Spare Parts
Additional Finisher Tray		200 sheets	200 sheets or 20 sets		Recommended Media
Saddle Stitch Unit				200 sheets or 20 sets	Appendix
1 st Tray	1200 sheets A4	200 sheets	200 sheets or 20 sets		
2 nd Tray (A4 / B4 or A3)		500 / 250 sheets	500 / 250 sheets or 50 / 25 sets		
Mail Bin Tray		500 sheets			
1 st Tray	1100 sheets A4	200 sheets	200 sheets or 20 sets		
2 nd Tray (A4 / B4 or A3)		200 / 100 sheets	200 / 100 sheets or 20 / 10 sets		
Additional Finisher Tray		200 sheets	200 sheets or 20 sets		
Mail Bin Tray		500 sheets			

Remark: If thicker paper (91 to 256 g/m²) or OHP, Envelops, etc. are used, capacity of the trays is reduced to 20 sheets!



Combination of Finishing Accessories							Product Basic
	FS-514	OT-601	MT-501	SD-503	PK-510		Product Configuration
FS-514		Yes	Yes ¹⁾	Yes ¹⁾	Yes		System Specifications
OT-601	Yes		Yes	Yes	Yes		Copier Specifications
MT-501	Yes	Yes		No	Yes		Printer Specifications
SD-503	Yes	Yes	No		Yes		Scanner Specifications
PK-510	Yes	Yes	Yes	Yes			Fax Specifications
¹⁾ Either MT-501 or SD-503 can be used with FS-514							Consumables
							Article Numbers
							Installation
							Maintenance
							Spare Parts
							Recommended Media
							Appendix

Finishing Matrix					
	FS-514	Mail Bin Tray	Punching	Stapling	Fold / Saddle Stitch
FS-514		Yes	Yes	Yes	Yes
Mail Bin Tray	Yes		Yes	No	No
Punching	Yes	Yes		Yes	Yes
Stapling	Yes	No	Yes		Yes
Fold / Saddle Stitch	Yes	No	Yes	Yes	



Paper Weights				Product Basic
bizhub C300 bizhub C352	Option / Feature	60 ~ 90 g/m ²	91 ~ 256 g/m ²	Product Configuration
	PC-103	Yes	No	System Specifications
	PC-203	Yes	No	Copier Specifications
	PC-403	Yes	No	Printer Specifications
	Manual Feed	Yes	Yes	Scanner Specifications
	Duplex	Yes	Yes	Fax Specifications
FS-514	1 st Tray	Yes	Yes	Consumables
	2 nd Tray	Yes	Yes	Article Numbers
	Additional Tray	Yes	No	Installation
	Mail Bin	Yes	No	Maintenance
Finishing Functionality	Stapling	Yes	Up to 120 g/m ²	Spare Parts
	Punching	Yes	No	Recommended Media
	Folding	Yes	Up to 150 g/m ²	Appendix



Copy Speed Simplex (B/W & Full Color)						Product Basic
Size	Multi Purpose Tray	Multi Bypass Tray	Universal Tray	Paper Cabinet/ Large Capacity Tray (A4 only)	Special Media Mode / Glossy Mode	Product Configuration
A3	17 cpm	17 cpm	17 cpm	17 cpm	6 cpm	System Specifications
A4	35 cpm	35 cpm	35 cpm	35 cpm	12 cpm	Copier Specifications
A4S	25 cpm	25 cpm	25 cpm	25 cpm / 21 cpm ¹⁾	8 cpm / 7 cpm ¹⁾	Printer Specifications
A5	35 cpm	35 cpm	N/A	N/A	12 cpm	Scanner Specifications
A5S	35 cpm	35 cpm	35 cpm	35 cpm	12 cpm	Fax Specifications
Copy Speed Duplex (B/W & Full Color)						Consumables
A3	12 sides / min.	12 sides / min.	12 sides / min.	12 sides / min.	4 sides / min.	Article Numbers
A4	32 sides / min.	32 sides / min.	32 sides / min.	32 sides / min. 30 sides / min. ² 26 sides / min. ³	11 sides / min. 10 sides / min. ² 8 sides / min. ³	Installation
A4S	14 sides / min.	14 sides / min.	14 sides / min.	14 sides / min.	5 sides / min.	Maintenance
A5	32 sides / min.	32 sides / min.	N/A	N/A	11 sides / min.	Spare Parts
A5S	32 sides / min.	32 sides / min.	32 sides / min.	32 sides / min. 30 sides / min. ² 26 sides / min. ³	11 sides / min. 10 sides / min. ² 8 sides / min. ³	Recommended Media
¹⁾ From the 4 th Tray only ²⁾ From the 3 rd Tray in B/W printing ³⁾ From 4 th Tray in B/W printing						Appendix



What is delivered with the machine?			Product Basic
Parts	Packed in Japan	Added in Europe	Product Configuration
Imaging Units (BK, Y, M, C)	Yes	---	System Specifications
EDH	---	---	Copier Specifications
Original Cover	---	---	Printer Specifications
Copy Tray	---	---	Scanner Specifications
Operator Manual	---	Yes	Fax Specifications
Face Sheets / Labels	---	Yes	Consumables
			Article Numbers
			Installation
			Maintenance
			Spare Parts
			Recommended Media
			Appendix